
ECLIPSE



CODE: 56 GR 3 EL EC 135

- Transfer hoist that allows users to be transferred comfortably from a bed, chair or even the floor
- Suitable for transfers to and from bed, chair, bath or even the floor, it can be used by patients with amputation, paraplegia, quadriplegia, among other conditions, by applying the most suitable transfer harnesses
- Easy hoist entry under a bed
- Easy to manoeuvre in small spaces and narrow aisles
- The movement of the arm is guaranteed by an electric actuator, equipped with a safety system in the event of an electrical failure, emergency button and mechanical anti-panic descent
- With two 12V 2.9Ah batteries, with autonomy for 40 cycles
- Base legs open with a manual lever to facilitate front access to the wheelchair
- With double 100 mm wheels, two with brakes
- Quick to assemble
- Various models available for different maximum user weights: Eclipse 135 (135 kg); Eclipse 150 (150 kg); Eclipse 180 (180 kg); Eclipse 220 (220 kg)
- The Eclipse 220 model has a 10000N actuator and detachable battery; the others have a 6000N actuator
- With various configurations/options available on Order Form, including harnesses

ECLIPSE

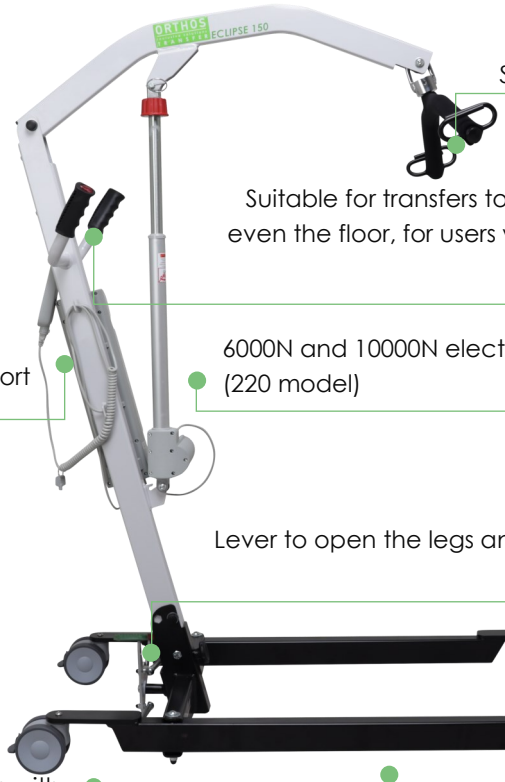

Steel harness support for maximum safety

Suitable for transfers to and from bed, chair, bath or even the floor, for users with amputations, paraplegia or other conditions

6000N and 10000N electric motor (220 model)

Handle for easy transport

Lever to open the legs and facilitate access to the wheelchair

Double 100 mm wheels with brakes

Double 100 mm wheels without brakes

Various **configurations/options** available such as electric leg opening, scale, model 150 with hydraulic actuation and additional battery for model 220



Various harnesses available according to the needs



Electrically actuated arm





Various hoist models available for different maximum user weights

ECLIPSE

TECHNICAL DATA

	ECLIPSE 135	ECLIPSE 150	ECLIPSE 180	ECLIPSE 220
MINIMUM HEIGHT (A)	760 mm	760 mm	730 mm	730 mm
MAXIMUM HEIGHT (B)	1820 mm	1820 mm	1955 mm	1955 mm
BASE LENGTH (C)	1085 mm	1185 mm	1235 mm	1235 mm
INTERIOR WIDTH WITH CLOSED LEGS (D)	390 mm	460 mm	460 mm	525 mm
INTERIOR WIDTH WITH OPEN LEGS (E)	790 mm	920 mm	950 mm	1035 mm
BASE HEIGHT (F)	105 mm	105 mm	105 mm	105 mm
ARM LENGTH (G)	810 mm	810 mm	910 mm	910 mm
EXTERIOR WIDTH WITH CLOSED LEGS (H)	555 mm	625 mm	625 mm	685 mm
EXTERIOR WIDTH WITH OPEN LEGS (I)	955 mm	1085 mm	1100 mm	1200 mm
MINIMUM HARNESS SUPPORT HEIGHT	650 mm	650 mm	620 mm	620 mm
MAXIMUM HARNESS SUPPORT HEIGHT	1725 mm	1710 mm	1860 mm	1845 mm
TURNING RADIUS	1200 mm	1300 mm	1360 mm	1390 mm
ELECTRIC ACTUATOR	6000 N	6000 N	6000 N	10000 N
BATTERIES	2 x 12V 2,9 Ah	2 x 12V 2,9 Ah	2 x 12V 2,9 Ah	2 x 12V 2,9 Ah
PRODUCT WEIGHT	37 kg	38 kg	42,4 kg	54,4 kg
MAXIMUM USER WEIGHT	135 kg	150 kg	180 kg	220 kg

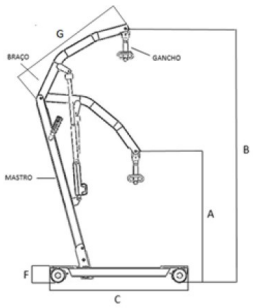

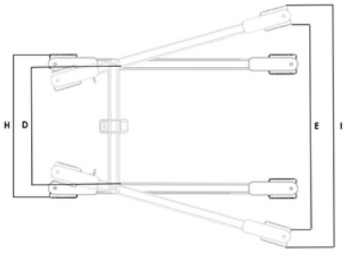

Tolerance: ±10 mm; ±1°; ±1 kg
Updated in 08/2025

LOCATION

R. Nossa Sra. de Fátima nº 1360

União de Freguesias de Briteiros Sta. Leocádia e

S. Salvador, 4805-449 - Guimarães - Portugal

CONTACTS

Telephone: 351 912 545 001

E-mail: export@orthosxxi.com

exportcommercial@orthosxxi.com

ORTHOS Inclusive solutions MOBILITY | ORTHOS Inclusive solutions MOBILITY TECH | ORTHOS Inclusive solutions PAEDIATRICS | ORTHOS Inclusive solutions WALKING AIDS | ORTHOS Inclusive solutions GERIATRICS | ORTHOS Inclusive solutions BATH&CLEAN | ORTHOS Inclusive solutions TRANSFER | ORTHOS Inclusive solutions HOSPITAL | ORTHOS Inclusive solutions PREVENTION | ORTHOS Inclusive solutions SIT&STAND | ORTHOS Inclusive solutions BARIATRICS

NOTE: in case of divergence between text and image, prevails the information described in the text. For continuous improvement, Orthos XXI reserves the right to make changes to its products without prior notice.