ECLIPSE STAND UP 150



CODE: 56 GR 3 EL CP 150

- Transfer crane that allows users to be verticalized
- Designed for users with some lower limb strength
- Depth adjustment of the crane arm to ensure greater comfort during verticalization
- Knee support adjustable in depth, height and angle
- Detachable footrest
- Base legs open with a lever to facilitate front access to the wheelchair
- With double 100 mm wheels, two with brakes
- 1500 N electric actuator, 13 mm/s speed, equipped with safety system and emergency button
- Chest harness included and other harness options

ECLIPSE STAND UP 150



Adjustable arm 150 mm in depth, ensures greater comfort during verticalisation

4-point harness option

Comfort chest harness included as standard with the crane



1500N electric motor and 13 mm/s speed

Knee support adjustable in height, depth and angle

Lever to open the legs and facilitate access to the wheelchair

Detachable footrest

Double 100 mm wheels with brakes

Double 100 mm wheels without brakes



2-point harness with increased lumbar support for users who need additional support and comfort

Padded restraint belt for greater user comfort, preventing friction


4-point harness for attaching to the verticalising crane, with restraining belt, to increase safety during lifting



ECLIPSE STAND UP 150

TECHNICAL DATA

MINIMUM HEIGHT (A)	950 mm
MAXIMUM HEIGHT (B)	1520 mm
BASE LENGTH (C)	1000 mm
INTERIOR WIDTH WITH CLOSED LEGS (D)	430 mm
INTERIOR WIDTH WITH OPEN LEGS (E)	700 mm
INTERIOR END WIDTH WITH OPEN LEGS (F)	885 mm
EXTERIOR WIDTH WITH OPEN LEGS (G)	995 mm
EXTERIOR WIDTH WITH CLOSED LEGS (H)	550 mm
HEIGHT OF KNEE SUPPORT (I)	425 até 540 mm
DEPTH OF KNEE SUPPORT (J)	105 to 165 mm
KNEE SUPPORT ANGLE (K)	-6° to 6°
ARM LENGTH (L)	435 to 585 mm
BASE HEIGHT (M)	105 mm
HANDLE WIDTH (N)	675 mm
FOOTREST WIDTH (O)	390 mm
FOOTREST DEPTH (P)	330 mm
ROTATION DIAMETER	1200 mm
WHEEL DIAMETER	100 mm, 2 with spring locker
ELECTRIC ACTUATOR	1500 N
BATTERIES	2 x 24 V; 2,9 Ah
STRUCTURE COLOUR	White
PRODUCT WEIGHT	40,6 kg
MAXIMUM USER WEIGHT	150 kg

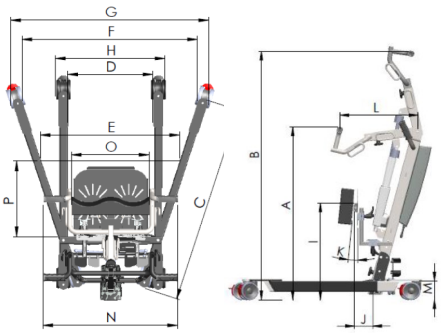

Tolerance: ±10 mm; ±1°; ±1 kg
Updated in 08/2025

LOCATION

R. Nossa Sra. de Fátima nº 1360

União de Freguesias de Briteiros Sta. Leocádia e

S. Salvador, 4805-449 - Guimarães - Portugal

CONTACTS

Telephone: 351 912 545 001

E-mail: export@orthosxxi.com

exportcommercial@orthosxxi.com

ORTHOS Inclusive solutions MOBILITY | ORTHOS Inclusive solutions MOBILITY TECH | ORTHOS Inclusive solutions PAEDIATRICS | ORTHOS Inclusive solutions WALKING AIDS | ORTHOS Inclusive solutions GERIATRICS | ORTHOS Inclusive solutions BATH&CLEAN | ORTHOS Inclusive solutions TRANSFER | ORTHOS Inclusive solutions HOSPITAL | ORTHOS Inclusive solutions PREVENTION | ORTHOS Inclusive solutions SIT&STAND | ORTHOS Inclusive solutions BARIATRICS

NOTE: in case of divergence between text and image, prevails the information described in the text. For continuous improvement, Orthos XXI reserves the right to make changes to its products without prior notice.