AGILA

2474PJP150R36-28S45 D M8 across

EAN 4031582472646

Swivel castor with central, total lock and central directional lock, housing made of pressed steel, bright zinc plated, blue passivated, double ball bearing swivel head, wheel axle with nut, stem with cam hole for profile bars, short version. Wheel centre made of Polypropylene, Tread: TENTEprene (thermoplastic rubber), grey non-marking, precision ball bearing , with threadguards



Picture may differ from original product


Technical Data

Wheel diameter	150 mm
Width of Tread	32 mm
Castor width	60 mm
Bolt-Ø	28 mm
Bolt length	88 mm
Offset	45 mm
Swivel Interference	240 mm
Overall height	188 mm
Temperature	- 20 / + 60 °C
Standard	EN 12530
Weight	1.08 kg
Swivel Radius	120 mm
Hardness of tread	Shore A 87
Load capacity	100 kg
Load capacity (static)	200 kg


Advantages at a glance

Roll performance	● ● ● ○ ○
Movement noise	● ● ● ○ ○
Attrition	● ● ● ○ ○
Corrosion resistance	● ● ● ○ ○

Dimensions



Structure & Mounting

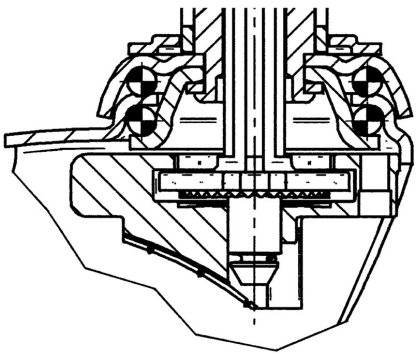

© Copyright 2020 TENTE International **www.tente.com** 29/04/2020